


Compact Product Suite hardware selector

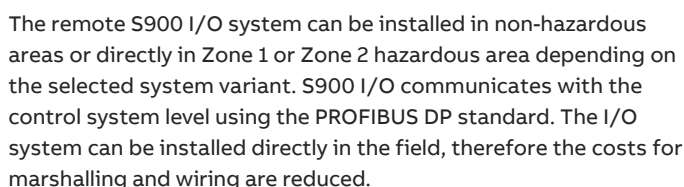

S900 I/O type S. For installation in hazardous area Zone 1. For connecting intrinsically safe field devices installed in Zone 2, Zone 1 or Zone 0.

Features and benefits

- DATA SHEET | 2024-05-02 | © Copyright 2024 | ABB

General info	
Article number	3KDE175511L9300
Type	Analog Input
Number of channels	4
Signal type	4...20 mA
HART	Yes
SOE	N/A
Redundancy	No
Intrinsic safety	Yes
Mechanics	S900

Environment and certification	
CE mark	Yes
Hazardous Location	ATEX Zone 1
Corrosive atmosphere ISA-S71.04	G3
Climatic operating conditions	Relative humidity max. 93 % +/- 3 % at 40°C
Max ambient temperature	-20 °C...60 °C
RoHS compliance	DIRECTIVE/2011/65/EU (EN 50581:2012)
WEEE compliance	DIRECTIVE/2012/19/EU
WEEE category	Small Equipment (No External Dimension More Than 50 cm)

Dimensions	
Width	20 mm (0.79 in.)
Depth	104 mm (4.09 in.)
Height	104 mm (4.09 in.)
Weight	0.14 kg (0.30 lbs.)

**solutions.abb/compactproductsuite
solutions.abb/controlsystems**

We reserve the right to make technical changes to the products or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB does not assume any responsibility for any errors or incomplete information in this document.

We reserve all rights to this document and the items and images it contains. The reproduction, disclosure to third parties or the use of the content of this document – including parts thereof – are prohibited without ABB's prior written permission.

Copyright© 2024 ABB All rights reserved